DEPCOM POWER // A KOCH ENGINEERED SOLUTIONS BUSINESS	Document #	Title	Revision	Released
	DPI-QA-FAI-0009	FAI Generation SOP	00	09/03/25

Originator	Approver
Gary Butzlaff III / Regional Quality Manager	Elijah Richardson / Senior Quality Manager

1. Purpose

1.1. The purpose of this SOP is to establish a standardized process for generating First Article Inspections (FAI) to verify that installation processes consistently produce completed product that meet specified requirements. This SOP aims to ensure product quality, bolster customer confidence, and adhere to regulatory standards when generating the FAI.

2. Scope

2.1. This SOP applies to all construction, quality assurance, and engineering personnel involved in the installation and inspection of new or significantly changed parts/products. The FAI process covers initial installation and subsequent verification when changes occur in design, location, or procedures.


3. Reference Documents

3.1. Site Quality Manual
3.2. Site Inspection Plan
3.3. Quality FAI SOP, Templates and Training
3.4. Manufacturer Installation Manual
3.5. Manufacturer Site Specific Drawings
3.6. Applicable ACI, ACSI, ASTM, ISO, and NEC NFPA codes
3.7. Site Specific Approved Drawings
3.8. RFIs and Material Submittals

4. Responsibilities

ROLE	RESPONSILITIES
Regional Quality Manager	Review and approve
Site Quality Manager	Generate and schedule
Quality Control Technician	Review and understand
Construction Manager	Review and provide feedback
Superintendent SME	Review and provide feedback
Field Engineer	Review and provide feedback
Subcontractor	Provide SoP, Review and understand

5. Process Map

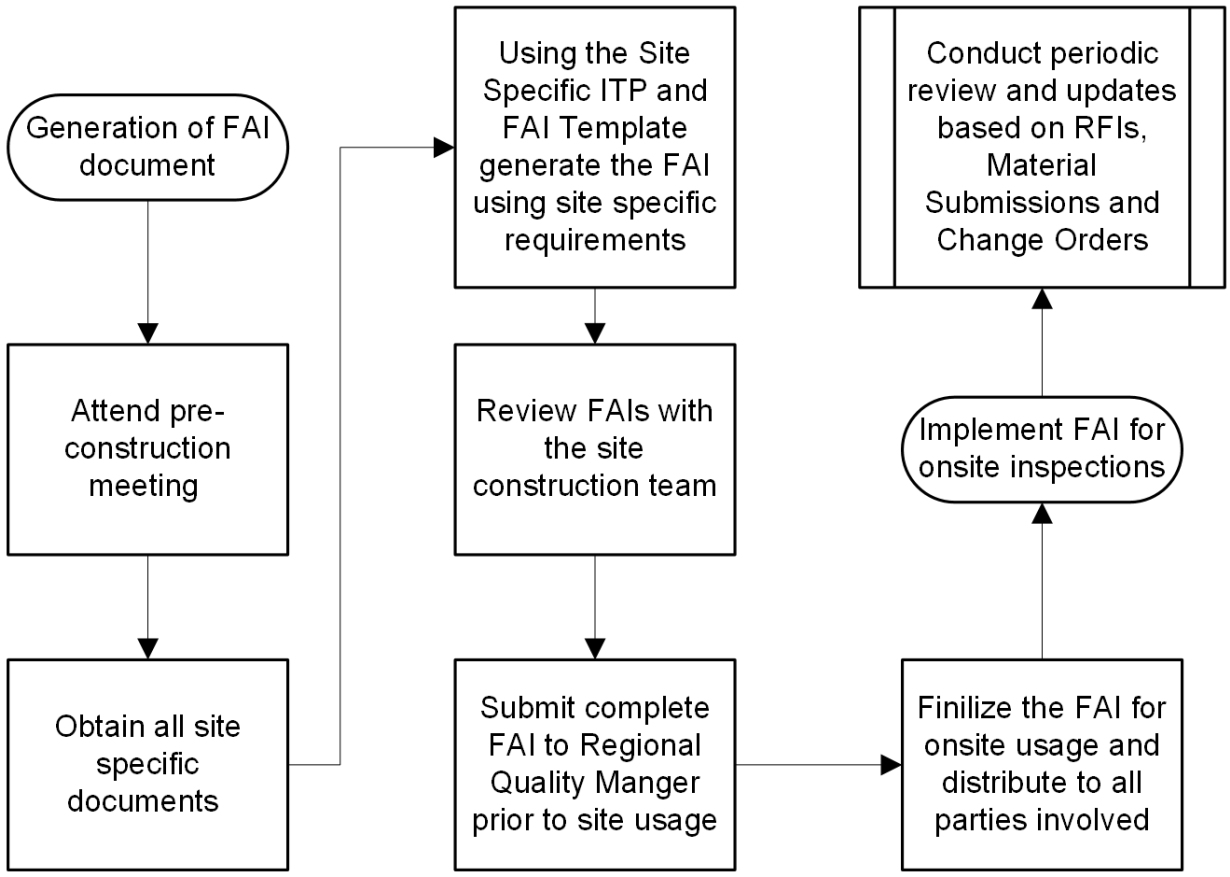

6. Procedure

6.1. Review all applicable project documentation and specifications.

6.1.1. The Quality Manager shall attend all Pre-Construction Meetings alongside the Construction Manager, Project Manager, Project Engineer, Field Engineer and respective Superintendent.

6.1.2. Obtain and review the latest DEPCOM Inspection Test Plan (ITP), EPC Agreement, manufacturer specifications, and site-specific design drawings.

6.1.3. Confirm understanding of key characteristics, acceptance criteria, and any site-specific requirements necessary for successful inspection and installation.

6.2. Draft the component-specific FAI checklist.

6.2.1. The Quality Manager shall utilize the DEPCOM FAI Template to outline all inspection criteria based on the ITP and product specifications.

6.2.2. Ensure inclusion of site-specific requirements, Standard Operating Procedures, regulatory codes, and any client-specific expectations.
6.2.3. Each line item must include clear inspection steps, measurable acceptance criteria, tolerances, and referenced documentation.

6.3. Conduct an internal review of the draft checklist.
6.3.1. The Quality Manager will facilitate a review with the Regional Quality Manager, Site Construction Team, and Inspection Team.
6.3.2. Verify alignment between the drafted checklist and the Subcontractor's Standard Operating Procedure (SOP) in coordination with the Superintendent Subject Matter Expert (SME).
6.3.3. Identify and correct any gaps, misalignments, or omissions prior to formal submission.

6.4. Submit for final approval.
6.4.1. Present the revised FAI checklist to the Regional Quality Manager for formal approval.
6.4.2. Address any feedback, document changes, and maintain revision control to ensure the most current version is used for field execution.

6.5. Finalize, store, and distribute the approved FAI checklist.
6.5.1. Upload the finalized FAI to Viewpoint for Projects and associate it with the relevant work package.
6.5.2. Distribute the checklist to the Inspection Team, Superintendent, and all other relevant stakeholders.
6.5.3. File a printed copy of the checklist within the site Job Book as the cover sheet for all future inspections of the associated component.

6.6. Maintain and revise as needed.
6.6.1. Periodically review active FAIs to ensure they reflect current specifications, RFIs, material submittals, or design revisions.
6.6.2. Any change that impacts on the inspection scope or criteria shall trigger an immediate review and revision of the FAI checklist.
6.6.3. All revisions must be approved, reissued, and communicated to affected teams.

7. Revision Table

REV. #	REV. DATE	DESCRIPTION	APPROVER
00	**09/03/25**	**Initial Release**	**Elijah Richardson**