DEPCOM POWER // A KOCH ENGINEERED SOLUTIONS BUSINESS	Document #	Title	Revision	Released
	DPI-QA-SOP-0013	Non-Conformance Reporting	1	9/10/2025

Originator	Approver
John DeVaney / Quality Manager	Elijah Richardson / QMS Sr. Manager

1. Purpose

This Standard Operating Procedure (SOP) defines the documenting, processing, and completion of the Procore Non-Conformance Report for Site Quality Managers.

2. Scope

This SOP applies to any product or process with an issue discovered during DEPCOM EPC Construction and/or DEPCOM Commissioning of a construction site, (Fixed, Tracker, BESS, etc.).

4. Examples

Examples of Observations:

2.1.1. Hardware in the wrong stacking order but un-torqued.
2.1.2. Hardware left un-torqued.
2.1.3. Wire landed at the wrong location.
2.1.4. Wire not landed.
2.1.5. Wire Management zip-tie too loose, tight, or facing the wrong direction.
2.1.6. Incorrect Hardware laid out but not installed. (Torque Beam, Slew Drive, etc.)
2.1.7. Battery Not Plugged In.
2.1.8. Missing Module Clip or Mounting Hardware.

2.2. **Escalation of Observation to NCR**

2.2.1. The escalation of an Observation to an NCR in Procore is a simple process in the Procore Software.
2.2.2. Generally, an Observation should be converted to an NCR after 3 working days if it is not otherwise complete.
2.2.3. Generally, an Observation that is presented after rework and does not meet specifications will be converted to an NCR.
2.2.4. Any Observation that is presented in worse condition than originally reported due to rework efforts shall be converted to an NCR.
2.2.5. Observations that are repeated multiple times by the same group, (Subcontractor, work team, shift) will require an NCR to allow Preventative Actions to be implemented. (To be determined by the SQM)


2.3. **Root Cause Analysis (RCA) Process (Formal/Informal)**

2.3.1. Formal RCA's are documented in CauseLink software
2.3.2. Any quality issue may require an Root Cause Analysis investigation, but not all are Formal RCAs written in CauseLink.
2.3.3. An Informal RCA may be added by the DEPCOM SQM to an Observation or an NCR to discover Corrective Action and Preventative Actions at the site level.

3. Responsibilities

ROLE	RESPONSILITIES
Approver (QMS Non-Conformance Manager)	Manages the documentation used for Non-Conformance tracking to ensure accurate record-keeping. Reviews requests for accuracy and completeness, ensuring compatibility with project requirements and standards, and assigns part number in ERP system.
Requestor (All DEPCOM Employees)	Initiates Non-Conformance Reports and tracks rework and repair.

4. Process Map

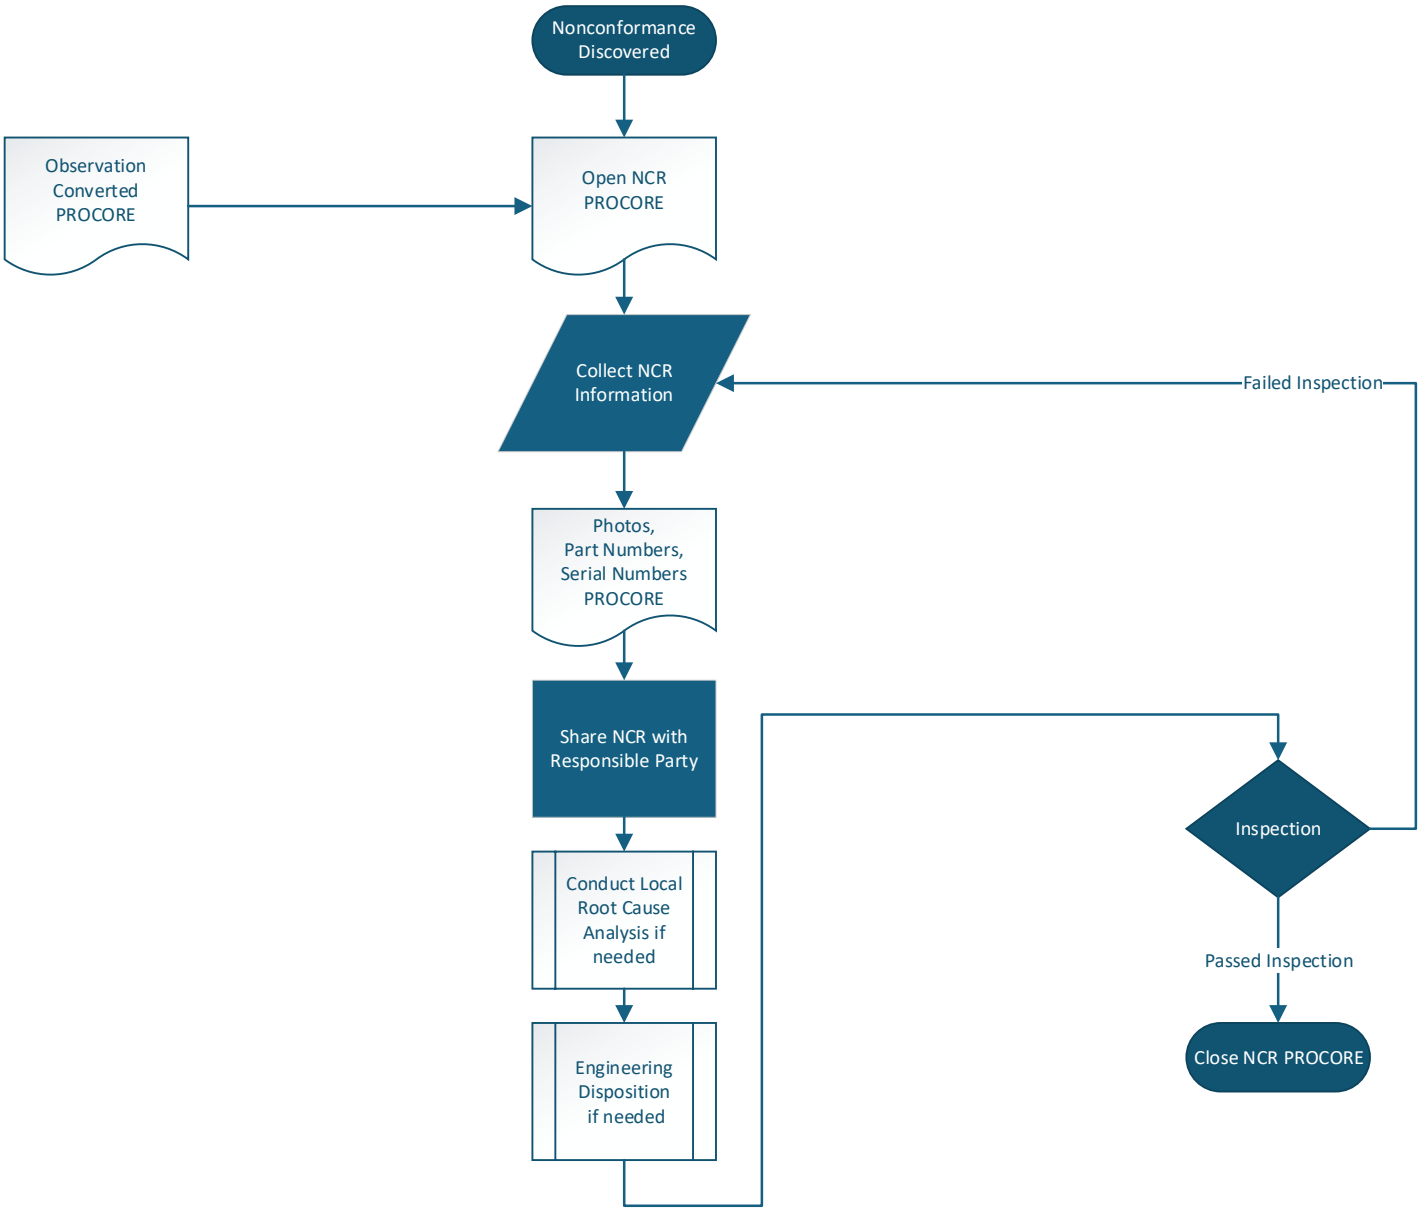

5. Procedure

5.1. **Initiation of Procore Non-Conformance Report (NCR)**

5.1.1. SQM discovers Out-Of-Spec condition. (Does not need to be during inspection)

5.1.2. SQM Opens Procore NCR Tab.

5.1.3. The SQM gathers necessary and available information, including specifications, failure mode, drawing numbers, etc.

5.1.4. The SQM gathers photos of non-conformant conditions, Data Plate or Part Marking, Shipping Label if available. If the issue is complex, add a photo of a conformant part for comparison.

5.2. **Opening of NCR**

5.2.1. Initiate the NCR in Procore.

5.2.2. Upload data, (including photos, and drawings).

5.2.3. Inform Responsible Party of condition and need for rework.

5.3. **Inspection and Approval**

5.3.1. SQM Inspects open NCR for completeness.

5.3.1.1. SQM Reviews all open NCRs daily for completion or delay.

5.3.2. The SQM Passes or Fails the NCR Rework Inspection within 3 business days.

5.3.2.1. If rejected the SQM provides feedback to the Responsible Party for necessary rework and resubmission.

5.4. **Notification**

5.4.1. Notify the Responsible Party and relevant project team members of the assigned NCR and any additional steps required completion and close-out.

5.5. **Documentation and Record Keeping**

5.5.1. Maintain records of all NCR reports and assignments within the Procore quality management system.

5.5.2. Ensure all documentation is stored securely and complies with company policies and regulatory requirements.

6. Revision Table

REV. #	REV. DATE	DESCRIPTION	APPROVER
00	**9/9/25**	**Initial Release**	**Elijah Richardson**
1	**9/10/25**	**Changes from 5 days to 3 days to convert Observation to NCR**	**Elijah Richardson**

7. Exhibits

7.1. PPP for Training

7.2. Click by Click Procore